




# 15mm Linear Guide Rail

standard, blackened

Linear Guide-ways

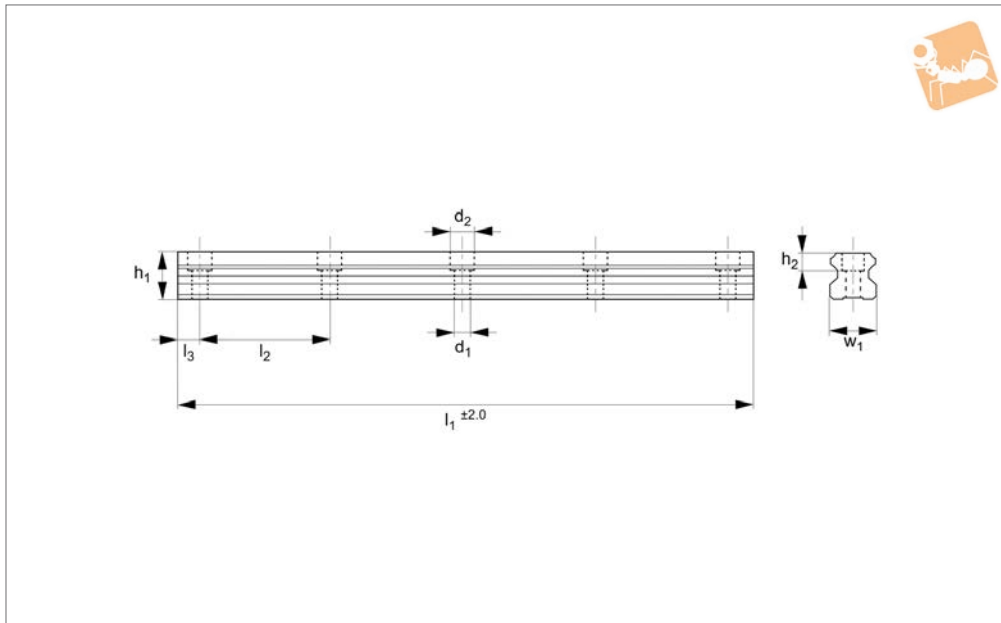

**L1016.BL15**

LINEAR GUIDEWAYS

### Material

Hardened and ground steel (typically 60 HRC). Black oxide.

part nos. L1016.F (flanged) and L1016.U (unflanged).

Other rail lengths on request.

Weight: 1,4 Kg/m.

### Tips

Plastic screw covers issued with the rails to protect screw holes from debris.

### Technical Notes

For carriages to suit the required load see

Order No.	Rail size	$l_1$	$h_1$	$l_2$	$w_1$	$l_3$	$h_2$	$d_1$	$d_2$	For screws	Weight kg
L1016.BL15-0160	15	160	13	60	15	20	6.0	4.5	7.5	M 4	0.22
L1016.BL15-0220	15	220	13	60	15	20	6.0	4.5	7.5	M 4	0.31
L1016.BL15-0280	15	280	13	60	15	20	6.0	4.5	7.5	M 4	0.39
L1016.BL15-0340	15	340	13	60	15	20	6.0	4.5	7.5	M 4	0.48
L1016.BL15-0400	15	400	13	60	15	20	6.0	4.5	7.5	M 4	0.56
L1016.BL15-0460	15	460	13	60	15	20	6.0	4.5	7.5	M 4	0.64
L1016.BL15-0520	15	520	13	60	15	20	6.0	4.5	7.5	M 4	0.73
L1016.BL15-0580	15	580	13	60	15	20	6.0	4.5	7.5	M 4	0.81
L1016.BL15-0640	15	640	13	60	15	20	6.0	4.5	7.5	M 4	0.90
L1016.BL15-0700	15	700	13	60	15	20	6.0	4.5	7.5	M 4	0.98
L1016.BL15-0760	15	760	13	60	15	20	6.0	4.5	7.5	M 4	1.06
L1016.BL15-0820	15	820	13	60	15	20	6.0	4.5	7.5	M 4	1.15
L1016.BL15-0880	15	880	13	60	15	20	6.0	4.5	7.5	M 4	1.23
L1016.BL15-0940	15	940	13	60	15	20	6.0	4.5	7.5	M 4	1.32
L1016.BL15-1000	15	1000	13	60	15	20	6.0	4.5	7.5	M 4	1.40
L1016.BL15-1060	15	1060	13	60	15	20	6.0	4.5	7.5	M 4	1.48
L1016.BL15-1120	15	1120	13	60	15	20	6.0	4.5	7.5	M 4	1.57
L1016.BL15-1180	15	1180	13	60	15	20	6.0	4.5	7.5	M 4	1.65
L1016.BL15-1240	15	1240	13	60	15	20	6.0	4.5	7.5	M 4	1.74
L1016.BL15-1300	15	1300	13	60	15	20	6.0	4.5	7.5	M 4	1.82
L1016.BL15-1360	15	1360	13	60	15	20	6.0	4.5	7.5	M 4	1.90
L1016.BL15-1420	15	1420	13	60	15	20	6.0	4.5	7.5	M 4	1.99
L1016.BL15-1480	15	1480	13	60	15	20	6.0	4.5	7.5	M 4	2.07
L1016.BL15-1540	15	1540	13	60	15	20	6.0	4.5	7.5	M 4	2.16
L1016.BL15-1600	15	1600	13	60	15	20	6.0	4.5	7.5	M 4	2.24
L1016.BL15-1660	15	1660	13	60	15	20	6.0	4.5	7.5	M 4	2.32
L1016.BL15-1720	15	1720	13	60	15	20	6.0	4.5	7.5	M 4	2.41
L1016.BL15-1780	15	1780	13	60	15	20	6.0	4.5	7.5	M 4	2.49
L1016.BL15-1840	15	1840	13	60	15	20	6.0	4.5	7.5	M 4	2.58
L1016.BL15-1900	15	1900	13	60	15	20	6.0	4.5	7.5	M 4	2.66
L1016.BL15-1960	15	1960	13	60	15	20	6.0	4.5	7.5	M 4	2.74
L1016.BL15-2020	15	2020	13	60	15	20	6.0	4.5	7.5	M 4	2.83



Order No.	Rail size	$l_1$	$h_1$	$l_2$	$w_1$	$l_3$	$h_2$	$d_1$	$d_2$	For screws	Weight kg
L1016.BL15-2080	15	2080	13	60	15	20	6.0	4.5	7.5	M 4	2.91
L1016.BL15-2140	15	2140	13	60	15	20	6.0	4.5	7.5	M 4	3.00
L1016.BL15-2200	15	2220	13	60	15	20	6.0	4.5	7.5	M 4	3.08
L1016.BL15-2260	15	2260	13	60	15	20	6.0	4.5	7.5	M 4	3.16
L1016.BL15-2320	15	2320	13	60	15	20	6.0	4.5	7.5	M 4	3.25
L1016.BL15-2380	15	2380	13	60	15	20	6.0	4.5	7.5	M 4	3.33
L1016.BL15-2440	15	2440	13	60	15	20	6.0	4.5	7.5	M 4	3.42
L1016.BL15-2500	15	2500	13	60	15	20	6.0	4.5	7.5	M 4	3.50
L1016.BL15-2560	15	2560	13	60	15	20	6.0	4.5	7.5	M 4	3.58
L1016.BL15-2620	15	2620	13	60	15	20	6.0	4.5	7.5	M 4	3.67
L1016.BL15-2680	15	2680	13	60	15	20	6.0	4.5	7.5	M 4	3.75
L1016.BL15-2740	15	2740	13	60	15	20	6.0	4.5	7.5	M 4	3.84
L1016.BL15-2800	15	2800	13	60	15	20	6.0	4.5	7.5	M 4	3.92
L1016.BL15-2860	15	2860	13	60	15	20	6.0	4.5	7.5	M 4	4.00
L1016.BL15-2920	15	2920	13	60	15	20	6.0	4.5	7.5	M 4	4.09
L1016.BL15-2980	15	2980	13	60	15	20	6.0	4.5	7.5	M 4	4.17
L1016.BL15-3040	15	3040	13	60	15	20	6.0	4.5	7.5	M 4	4.26
L1016.BL15-3100	15	3100	13	60	15	20	6.0	4.5	7.5	M 4	4.34
L1016.BL15-3160	15	3160	13	60	15	20	6.0	4.5	7.5	M 4	4.42
L1016.BL15-3220	15	3220	13	60	15	20	6.0	4.5	7.5	M 4	4.51
L1016.BL15-3280	15	3280	13	60	15	20	6.0	4.5	7.5	M 4	4.59
L1016.BL15-3340	15	3340	13	60	15	20	6.0	4.5	7.5	M 4	4.68
L1016.BL15-3400	15	3400	13	60	15	20	6.0	4.5	7.5	M 4	4.76
L1016.BL15-3460	15	3460	13	60	15	20	6.0	4.5	7.5	M 4	4.84
L1016.BL15-3520	15	3520	13	60	15	20	6.0	4.5	7.5	M 4	4.93
L1016.BL15-3580	15	3580	13	60	15	20	6.0	4.5	7.5	M 4	5.01
L1016.BL15-3640	15	3640	13	60	15	20	6.0	4.5	7.5	M 4	5.10
L1016.BL15-3700	15	3700	13	60	15	20	6.0	4.5	7.5	M 4	5.18
L1016.BL15-3760	15	3760	13	60	15	20	6.0	4.5	7.5	M 4	5.26
L1016.BL15-3820	15	3820	13	60	15	20	6.0	4.5	7.5	M 4	5.35
L1016.BL15-3880	15	3880	13	60	15	20	6.0	4.5	7.5	M 4	5.43
L1016.BL15-3940	15	3940	13	60	15	20	6.0	4.5	7.5	M 4	5.52
L1016.BL15-4000	15	4000	13	60	15	20	6.0	4.5	7.5	M 4	5.60