



20mm Aluminium Linear Guide Rail


rear fixing with stainless raceways

Linear Guide-ways



L1018.20R

LINEAR GUIDEWAYS

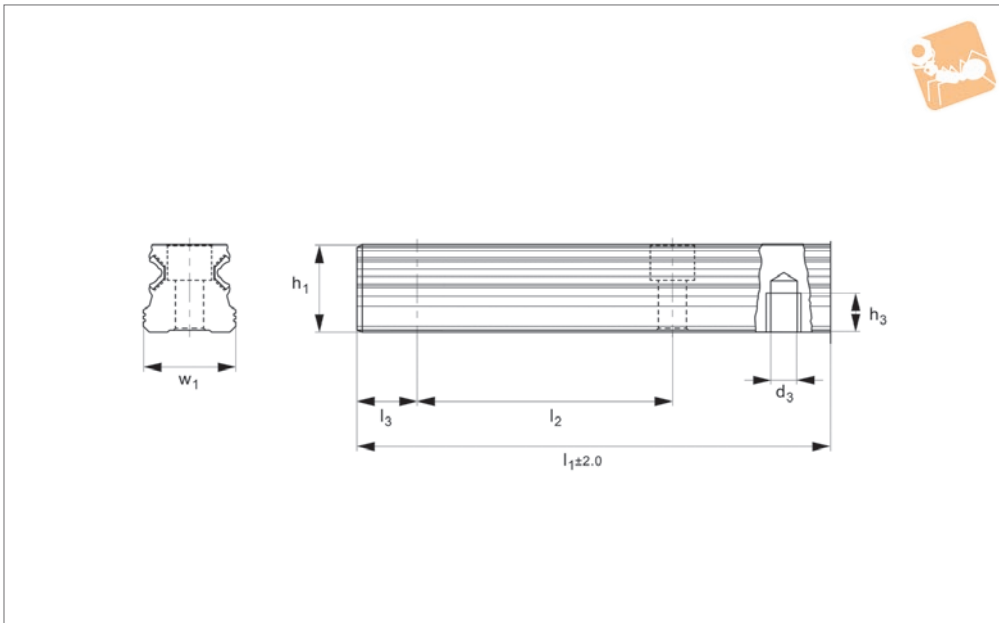

Material

Aluminium profile (AlMgSi0.5, anodized 12-15µ). Raceway stainless steel (X46Cr13), hardened to 58-62HRC.

versus steel versions. The aluminium rails are made of high quality aluminium alloy with hardened stainless steel raceway.

weight aluminium carriages. For standard steel linear guideways and carriages see part no. L1016.

Technical Notes

Compact, light-weight design. 60% saving

Tips

These are very lightweight aluminium rails and can only be used with our light-

Order No.	Rail size	w ₁	h ₁	d ₁	d ₃	h ₃	l ₂	l ₃	Weight kg
L1018.20-0180-R	20	20	19.3	180	M6	9	60	28	0.2
L1018.20-0240-R	20	20	19.3	240	M6	9	60	28	0.2
L1018.20-0300-R	20	20	19.3	300	M6	9	60	28	0.3
L1018.20-0360-R	20	20	19.3	360	M6	9	60	28	0.4
L1018.20-0420-R	20	20	19.3	420	M6	9	60	28	0.4
L1018.20-0480-R	20	20	19.3	480	M6	9	60	28	0.5
L1018.20-0540-R	20	20	19.3	540	M6	9	60	28	0.5
L1018.20-0600-R	20	20	19.3	600	M6	9	60	28	0.6
L1018.20-0660-R	20	20	19.3	660	M6	9	60	28	0.6
L1018.20-0720-R	20	20	19.3	720	M6	9	60	28	0.7
L1018.20-0780-R	20	20	19.3	780	M6	9	60	28	0.8
L1018.20-0840-R	20	20	19.3	840	M6	9	60	28	0.8
L1018.20-0900-R	20	20	19.3	900	M6	9	60	28	0.9
L1018.20-0960-R	20	20	19.3	960	M6	9	60	28	0.9
L1018.20-1020-R	20	20	19.3	1020	M6	9	60	28	1.0
L1018.20-1080-R	20	20	19.3	1080	M6	9	60	28	1.1
L1018.20-1140-R	20	20	19.3	1140	M6	9	60	28	1.1
L1018.20-1200-R	20	20	19.3	1200	M6	9	60	28	1.2
L1018.20-1260-R	20	20	19.3	1260	M6	9	60	28	1.2
L1018.20-1320-R	20	20	19.3	1320	M6	9	60	28	1.3
L1018.20-1380-R	20	20	19.3	1380	M6	9	60	28	1.4
L1018.20-1440-R	20	20	19.3	1440	M6	9	60	28	1.4
L1018.20-1500-R	20	20	19.3	1500	M6	9	60	28	1.5
L1018.20-1560-R	20	20	19.3	1560	M6	9	60	28	1.5
L1018.20-1620-R	20	20	19.3	1620	M6	9	60	28	1.6
L1018.20-1680-R	20	20	19.3	1680	M6	9	60	28	1.6
L1018.20-1740-R	20	20	19.3	1740	M6	9	60	28	1.7
L1018.20-1800-R	20	20	19.3	1800	M6	9	60	28	1.8
L1018.20-1860-R	20	20	19.3	1860	M6	9	60	28	1.8
L1018.20-1920-R	20	20	19.3	1920	M6	9	60	28	1.9
L1018.20-1980-R	20	20	19.3	1980	M6	9	60	28	1.9



Order No.	Rail size	w ₁	h ₁	d ₁	d ₃	h ₃	l ₂	l ₃	Weight kg
L1018.20-2040-R	20	20	19.3	2040	M6	9	60	28	2.0
L1018.20-2100-R	20	20	19.3	2100	M6	9	60	28	2.1
L1018.20-2160-R	20	20	19.3	2160	M6	9	60	28	2.1
L1018.20-2220-R	20	20	19.3	2220	M6	9	60	28	2.2
L1018.20-2280-R	20	20	19.3	2280	M6	9	60	28	2.2
L1018.20-2340-R	20	20	19.3	2340	M6	9	60	28	2.3
L1018.20-2400-R	20	20	19.3	2400	M6	9	60	28	2.4
L1018.20-2460-R	20	20	19.3	2460	M6	9	60	28	2.4
L1018.20-2520-R	20	20	19.3	2520	M6	9	60	28	2.5
L1018.20-2580-R	20	20	19.3	2580	M6	9	60	28	2.5
L1018.20-2640-R	20	20	19.3	2640	M6	9	60	28	2.6
L1018.20-2700-R	20	20	19.3	2700	M6	9	60	28	2.6
L1018.20-2760-R	20	20	19.3	2760	M6	9	60	28	2.7
L1018.20-2820-R	20	20	19.3	2820	M6	9	60	28	2.8
L1018.20-2880-R	20	20	19.3	2880	M6	9	60	28	2.8
L1018.20-2940-R	20	20	19.3	2940	M6	9	60	28	2.9
L1018.20-3000-R	20	20	19.3	3000	M6	9	60	28	2.9
L1018.20-3060-R	20	20	19.3	3060	M6	9	60	28	3.0
L1018.20-3120-R	20	20	19.3	3120	M6	9	60	28	3.1
L1018.20-3180-R	20	20	19.3	3180	M6	9	60	28	3.1
L1018.20-3240-R	20	20	19.3	3240	M6	9	60	28	3.2
L1018.20-3300-R	20	20	19.3	3300	M6	9	60	28	3.2
L1018.20-3360-R	20	20	19.3	3360	M6	9	60	28	3.3
L1018.20-3420-R	20	20	19.3	3420	M6	9	60	28	3.4
L1018.20-3480-R	20	20	19.3	3480	M6	9	60	28	3.4
L1018.20-3540-R	20	20	19.3	3540	M6	9	60	28	3.5
L1018.20-3600-R	20	20	19.3	3600	M6	9	60	28	3.5
L1018.20-3660-R	20	20	19.3	3660	M6	9	60	28	3.6
L1018.20-3720-R	20	20	19.3	3720	M6	9	60	28	3.6
L1018.20-3780-R	20	20	19.3	3780	M6	9	60	28	3.7
L1018.20-3840-R	20	20	19.3	3840	M6	9	60	28	3.8
L1018.20-3900-R	20	20	19.3	3900	M6	9	60	28	3.8
L1018.20-3960-R	20	20	19.3	3960	M6	9	60	28	3.9
L1018.20-4000-R	20	20	19.3	4000	M6	9	60	28	3.9

Ordering Example

