
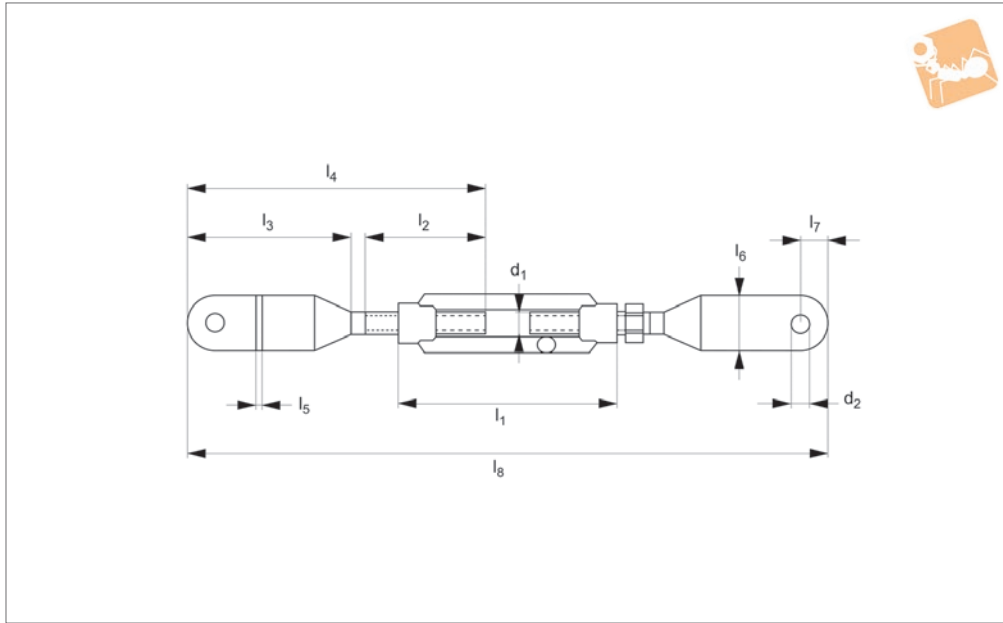


Plain End Turnbuckles

steel

Turnbuckles

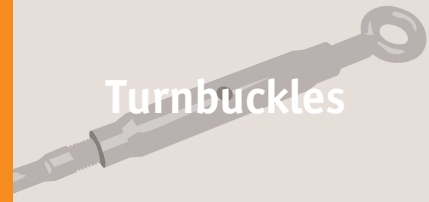

R3838

TURNBUCKLES

Material

Steel (1.0037 up to M48 then 1.0052), zinc-plated.

Hot dip galvanized body, available on request providing increased protection against corrosion. Please add -FZ for hot dip galvanized, e.g. R3804.006-FZ.

Technical Notes

To DIN 1480 plain ends.

Tips

Turnbuckles consist of a metal frame with right hand thread one end and left hand thread the other end. Used for tensioning

by rotating turnbuckle body without twisting attached rope or cable.

Important Notes

Turnbuckles are not to be used for lifting. Only suitable for use in tension.

Order No.	d ₁	l ₁	l ₂	l ₃	l ₄	d ₂	l ₅	l ₆	l ₇	l ₈ min.	l ₈ max.	Weight kg
R3838.008-ZP	M 8	110	75	50	125	9.0	4	20	11	250	325	0.19
R3838.010-ZP	M10	110	90	60	150	10.5	4	25	13	300	385	0.30
R3838.012-ZP	M12	125	91	74	165	13.0	5	30	16	331	411	0.48
R3838.016-ZP	M16	125	105	135	240	14.0	8	40	20	481	591	1.14
R3838.020-ZP	M20	200	105	135	240	17.0	9	44	26	480	610	1.84
R3838.024-ZP	M24	255	160	145	305	22.0	10	70	43	611	781	3.10