



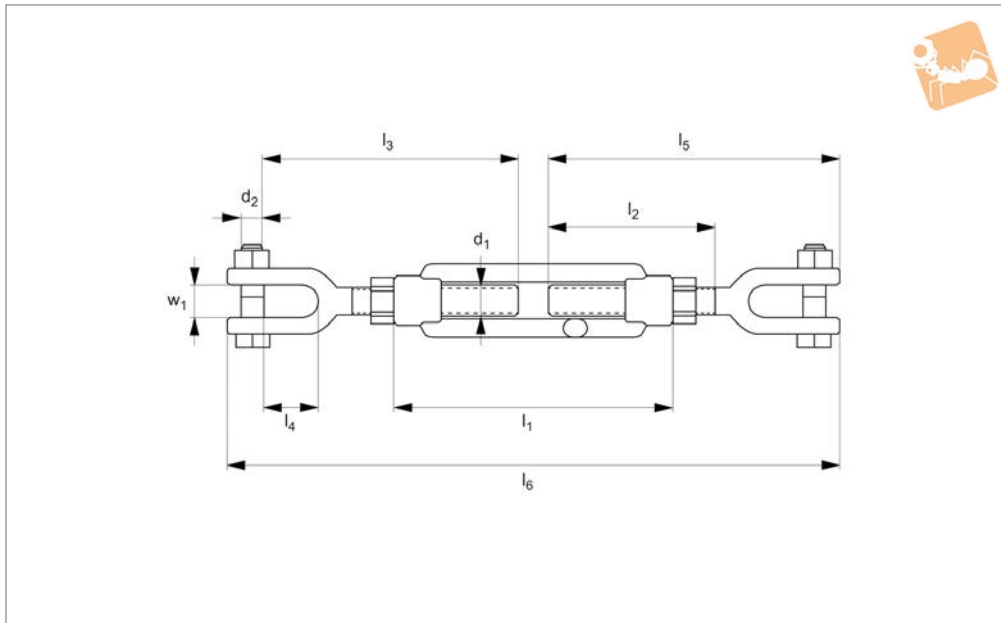

# Jaw End Turnbuckle steel

## Turnbuckles

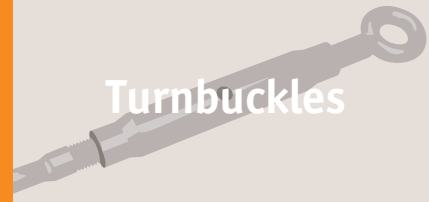

**R3848**

TURNBUCKLES

### Material

Steel body (1.0037), jaws (1.0503), zinc-plated.

Hot dip galvanized body, available on request providing increased protection against corrosion. Please add -FZ for hot dip galvanized, e.g. R3804.006-FZ.

### Technical Notes

To DIN 1480 jaw to jaw.

### Tips

Turnbuckles consist of a metal frame with right hand thread one end and left hand thread the other end. Used for tensioning

by rotating turnbuckle body without twisting attached rope or cable.

### Important Notes

**Turnbuckles are not to be used for lifting. Only suitable for use in tension.**

Order No.	d <sub>1</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>	d <sub>2</sub>	l <sub>5</sub>	l <sub>6</sub> min.	l <sub>6</sub> max.	w	Weight kg
R3848.008-ZP	M 8	110	68	116	28.75	8.5	125	250	325	9.0	0.14
R3848.010-ZP	M10	125	82	130	29.25	8.5	139	279	364	10.7	0.26
R3848.012-ZP	M12	125	90	150	44.75	10.5	160	321	401	15.5	0.40
R3848.016-ZP	M16	170	102	172	45.25	12.5	186	372	482	20.0	0.64
R3848.020-ZP	M20	200	115	185	59.50	17.5	205	410	540	23.5	1.30
R3848.024-ZP	M24	255	125	215	62.75	20.5	240	481	651	29.0	2.28
R3848.030-ZP	M30	255	150	255	89.50	25.5	290	581	741	34.0	4.02