



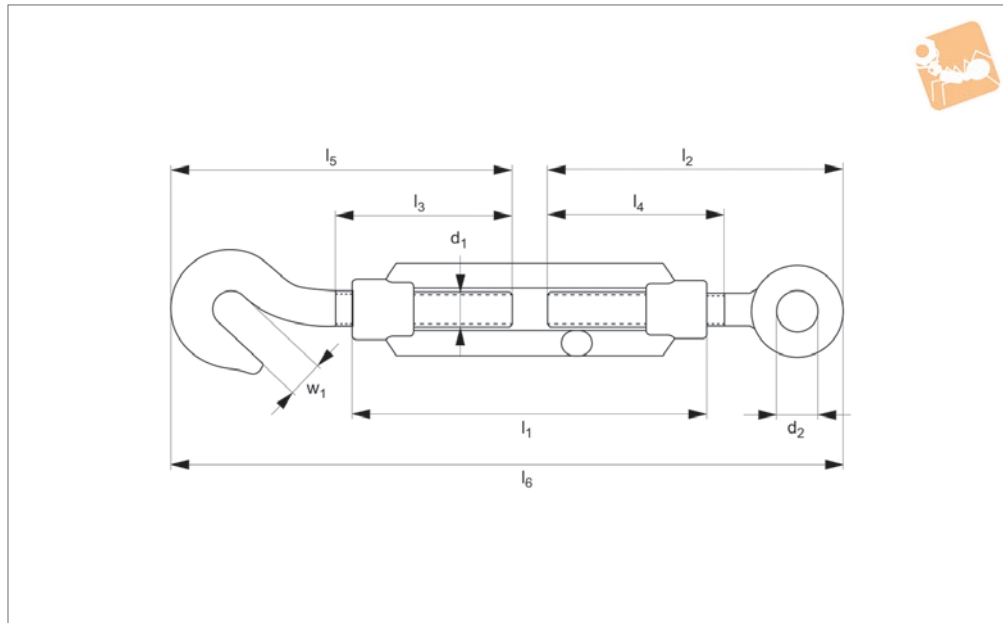

Hook & Eye Turnbuckles

steel

Turnbuckles

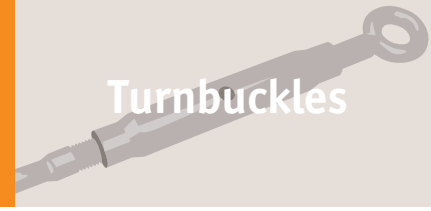

R3850

TURNBUCKLES

Material

Steel (1.0037), zinc-plated.
Hot dip galvanized body, available on request providing increased protection against corrosion. Please add -FZ for hot dip galvanized, e.g. R3804.006-FZ.

Tips

Turnbuckles consist of a metal frame with right hand thread one end and left hand thread the other end. Used for tensioning by rotating turnbuckle body without twisting attached rope or cable.

Only suitable for use in tension.

Technical Notes

To DIN 1480 hook & eye.

Important Notes

Turnbuckles are not to be used for lifting.

Order No.	d ₁	l ₁	l ₂	l ₃	l ₄	d ₂	l ₅	l ₆ min.	l ₆ max.	w ₁	Weight kg
R3850.006-ZP	M 6	110	74	50	50	10	77.0	151	231	8.0	0.09
R3850.008-ZP	M 8	110	80	60	52	11	98.0	172	253	10.0	0.15
R3850.010-ZP	M10	125	95	73	59	15	116.5	212	297	12.5	0.26
R3850.012-ZP	M12	125	107	90	66	17	146.0	264	344	16.0	0.40
R3850.016-ZP	M16	170	146	100	85	22	165.0	311	421	16.0	0.95
R3850.020-ZP	M20	200	170	105	100	24	180.0	350	480	18.0	1.64
R3850.024-ZP	M24	255	213	135	120	33	225.0	439	609	30.0	2.85
R3850.030-ZP	M30	255	255	140	135	39	255.0	511	671	30.0	4.11
R3850.036-ZP	M36	295	260	170	140	37	300.0	561	741	32.0	7.45