




Steel Lead Screws

right hand thread

Lead Screws & Nuts

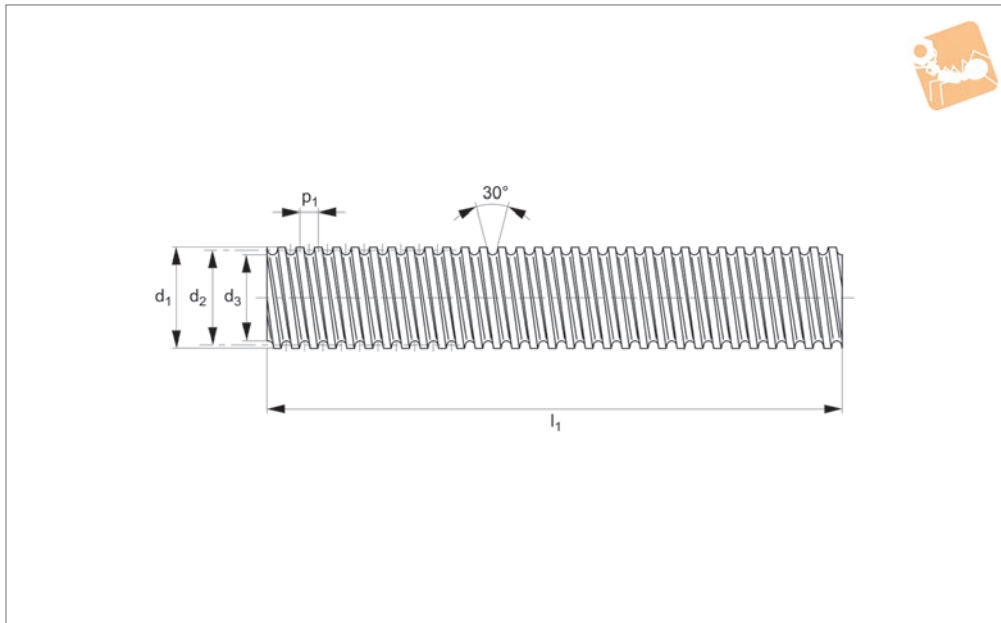

L1320

LEAD SCREWS & NUTS

Material

Rolled trapezoidal thread, steel EN 10083-2 (C35, DIN 1.0501) or (C45, DIN 1.0503). Manufactured to ISO 2901/2903 (DIN 103). Surface hardness approx. 250HB.

Technical Notes

'Lead' refers to the distance that a nut will travel for a complete revolution of the screw.

Select a suitable lead screw nut (part nos. L1330 to L1343) to suit the lead screw - the most popular nuts are the flanged, bronze nuts part no. L1331. Single start lead screws are less expensive than twin start lead screws.

Tips

These are the standard right hand thread lead screws - for left hand thread versions

see part no. L1321. For stainless steel right hand lead screws see part no. L1322. Cutting to required length and machining of ends - on request. Lead screw lengths of up to 6 metres can be provided for a diameter >30mm.

Order No.	Size	No. of starts	d_1 tol. 7e	Lead	p_1	d_2 tol. 7e min.	d_2 tol. 7e max.	d_3 tol. 7h min.	d_3 tol. 7h max.	l_1	Lead angle	Pitch accuracy mm/300mm	Straightness mm/300mm	Weight kg
L1320.R10-02-1.0	TR10x2	1	10	2	2	8,739	8,929	6,891	7,500	1000	4°07'	0,2	0,5	0,48
L1320.R10-02-1.5	TR10x2	1	10	2	2	8,739	8,929	6,891	7,500	1500	4°07'	0,2	0,5	0,72
L1320.R10-02-2.0	TR10x2	1	10	2	2	8,739	8,929	6,891	7,500	2000	4°07'	0,2	0,5	0,96
L1320.R10-02-3.0	TR10x2	1	10	2	2	8,739	8,929	7,685	7,500	3000	4°07'	0,2	0,5	1,44
L1320.R10-04-1.0	TR10x4	2	10	4	2	8,716	8,929	7,685	7,500	1000	8°12'	0,3	0,5	0,48
L1320.R10-04-1.5	TR10x4	2	10	4	2	8,716	8,929	9,685	7,500	1500	8°12'	0,3	0,5	0,72
L1320.R10-04-2.0	TR10x4	2	10	4	2	8,716	8,929	9,685	7,500	2000	8°12'	0,3	0,5	0,96
L1320.R10-04-3.0	TR10x4	2	10	4	2	8,716	8,929	6,891	7,500	3000	8°12'	0,3	0,5	1,44
L1320.R12-03-1.0	TR12x3	1	12	3	3	10,191	10,415	7,685	8,500	1000	5°17'	0,2	0,5	0,65
L1320.R12-03-1.5	TR12x3	1	12	3	3	10,191	10,415	7,685	8,500	1500	5°17'	0,2	0,5	0,97
L1320.R12-03-2.0	TR12x3	1	12	3	3	10,191	10,415	7,685	8,500	2000	5°17'	0,2	0,5	1,30
L1320.R12-03-3.0	TR12x3	1	12	3	3	10,191	10,415	7,685	8,500	3000	5°17'	0,2	0,5	1,95
L1320.R12-06-1.0	TR12x6	2	12	6	3	10,164	10,415	7,685	8,500	1000	10°30'	0,3	0,5	0,65
L1320.R12-06-1.5	TR12x6	2	12	6	3	10,164	10,415	7,685	8,500	1500	10°30'	0,3	0,5	0,97
L1320.R12-06-2.0	TR12x6	2	12	6	3	10,164	10,415	7,685	8,500	2000	10°30'	0,3	0,5	1,30
L1320.R12-06-3.0	TR12x6	2	12	6	3	10,164	10,415	7,685	8,500	3000	10°30'	0,3	0,5	1,95
L1320.R14-03-1.0	TR14x3	1	14	3	3	12,191	12,415	9,685	10,500	1000	4°26'	0,2	0,5	0,93
L1320.R14-03-1.5	TR14x3	1	14	3	3	12,191	12,415	9,685	10,500	1500	4°26'	0,2	0,5	1,39
L1320.R14-03-2.0	TR14x3	1	14	3	3	12,191	12,415	9,685	10,500	2000	4°26'	0,2	0,5	1,86
L1320.R14-03-3.0	TR14x3	1	14	3	3	12,191	12,415	9,685	10,500	3000	4°26'	0,2	0,5	2,79
L1320.R14-06-1.0	TR14x6	2	14	6	3	12,164	12,415	9,685	10,500	1000	8°49'	0,3	0,5	0,93
L1320.R14-06-1.5	TR14x6	2	14	6	3	12,164	12,415	9,685	10,500	1500	8°49'	0,3	0,5	1,39
L1320.R14-06-2.0	TR14x6	2	14	6	3	12,164	12,415	9,685	10,500	2000	8°49'	0,3	0,5	1,86
L1320.R14-06-3.0	TR14x6	2	14	6	3	12,164	12,415	9,685	10,500	3000	8°49'	0,3	0,5	2,79
L1320.R16-04-1.0	TR16x4	1	16	4	4	13,640	13,905	10,474	11,500	1000	5°16'	0,05	0,5	1,17



Order No.	Size	No. of starts	d ₁ tol. 7e	Lead	p ₁	d ₂ tol. 7e min.	d ₂ tol. 7e max.	d ₃ tol. 7h min.	d ₃ tol. 7h max.	l ₁	Lead angle	Pitch accuracy mm/300mm	Straightness mm/300mm	Weight kg
L1320.R16-04-1.5	TR16x4	1	16	4	4	13,640	13,905	10,474	11,500	1500	5°16'	0,05	0,5	1,75
L1320.R16-04-2.0	TR16x4	1	16	4	4	13,640	13,905	10,474	11,500	2000	5°16'	0,05	0,5	2,34
L1320.R16-04-3.0	TR16x4	1	16	4	4	13,640	13,905	10,474	11,500	3000	5°16'	0,05	0,5	3,51
L1320.R16-08-1.0	TR16x8	2	16	8	4	13,608	13,905	10,474	11,500	1000	10°29'	0,1	0,5	1,17
L1320.R16-08-1.5	TR16x8	2	16	8	4	13,608	13,905	10,474	11,500	1500	10°29'	0,1	0,5	1,75
L1320.R16-08-2.0	TR16x8	2	16	8	4	13,608	13,905	10,474	11,500	2000	10°29'	0,1	0,5	2,34
L1320.R16-08-3.0	TR16x8	2	16	8	4	13,608	13,905	10,474	11,500	3000	10°29'	0,1	0,5	3,51
L1320.R18-04-1.0	TR18x4	1	18	4	4	15,640	15,905	12,474	13,500	1000	4°36'	0,05	0,5	1,52
L1320.R18-04-1.5	TR18x4	1	18	4	4	15,640	15,905	12,474	13,500	1500	4°36'	0,05	0,5	2,28
L1320.R18-04-2.0	TR18x4	1	18	4	4	15,640	15,905	12,474	13,500	2000	4°36'	0,05	0,5	3,04
L1320.R18-04-3.0	TR18x4	1	18	4	4	15,640	15,905	12,474	13,500	3000	4°36'	0,05	0,5	4,56
L1320.R18-08-1.0	TR18x8	2	18	8	4	15,608	15,905	12,474	13,500	1000	9°20'	0,1	0,5	1,52
L1320.R18-08-1.5	TR18x8	2	18	8	4	15,608	15,905	12,474	13,500	1500	9°20'	0,1	0,5	2,28
L1320.R18-08-2.0	TR18x8	2	18	8	4	15,608	15,905	12,474	13,500	2000	9°20'	0,1	0,5	3,04
L1320.R18-08-3.0	TR18x8	2	18	8	4	15,608	15,905	12,474	13,500	3000	9°20'	0,1	0,5	4,56
L1320.R20-04-1.0	TR20x4	1	20	4	4	17,640	17,905	14,474	15,500	1000	4°05'	0,05	0,5	1,94
L1320.R20-04-1.5	TR20x4	1	20	4	4	17,640	17,905	14,474	15,500	1500	4°05'	0,05	0,5	2,91
L1320.R20-04-2.0	TR20x4	1	20	4	4	17,640	17,905	14,474	15,500	2000	4°05'	0,05	0,5	3,88
L1320.R20-04-3.0	TR20x4	1	20	4	4	17,640	17,905	14,474	15,500	3000	4°05'	0,05	0,5	5,82
L1320.R20-08-1.0	TR20x8	2	20	8	4	17,608	17,905	14,474	15,500	1000	8°09'	0,1	0,5	1,94
L1320.R20-08-1.5	TR20x8	2	20	8	4	17,608	17,905	14,474	15,500	1500	8°09'	0,1	0,5	2,91
L1320.R20-08-2.0	TR20x8	2	20	8	4	17,608	17,905	14,474	15,500	2000	8°09'	0,1	0,5	3,88
L1320.R20-08-3.0	TR20x8	2	20	8	4	17,608	17,905	14,474	15,500	3000	8°09'	0,1	0,5	5,82
L1320.R22-05-1.0	TR22x5	1	22	5	5	19,114	19,394	15,294	16,500	1000	4°43'	0,05	0,2	2,29
L1320.R22-05-1.5	TR22x5	1	22	5	5	19,114	19,394	15,294	16,500	1500	4°43'	0,05	0,2	3,43
L1320.R22-05-2.0	TR22x5	1	22	5	5	19,114	19,394	15,294	16,500	2000	4°43'	0,05	0,2	4,58
L1320.R22-05-3.0	TR22x5	1	22	5	5	19,114	19,394	15,294	16,500	3000	4°43'	0,05	0,2	6,87
L1320.R22-10-1.0	TR22x10	2	22	10	5	19,058	19,394	15,294	16,500	1000	9°23'	0,2	0,3	2,29
L1320.R22-10-1.5	TR22x10	2	22	10	5	19,058	19,394	15,294	16,500	1500	9°23'	0,2	0,3	3,43
L1320.R22-10-2.0	TR22x10	2	22	10	5	19,058	19,394	15,294	16,500	2000	9°23'	0,2	0,3	4,58
L1320.R22-10-3.0	TR22x10	2	22	10	5	19,058	19,394	15,294	16,500	3000	9°23'	0,2	0,3	6,87
L1320.R24-05-1.0	TR24x5	1	24	5	5	21,094	21,394	17,269	18,500	1000	4°17'	0,05	0,2	2,78
L1320.R24-05-1.5	TR24x5	1	24	5	5	21,094	21,394	17,269	18,500	1500	4°17'	0,05	0,2	4,17
L1320.R24-05-2.0	TR24x5	1	24	5	5	21,094	21,394	17,269	18,500	2000	4°17'	0,05	0,2	5,56
L1320.R24-05-3.0	TR24x5	1	24	5	5	21,094	21,394	17,269	18,500	3000	4°17'	0,05	0,2	8,34
L1320.R24-10-1.0	TR24x10	2	24	10	5	21,058	21,394	17,269	18,500	1000	8°31'	0,2	0,3	2,78
L1320.R24-10-1.5	TR24x10	2	24	10	5	21,094	21,394	17,269	18,500	1500	8°31'	0,2	0,3	4,17
L1320.R24-10-2.0	TR24x10	2	24	10	5	21,094	21,394	17,269	18,500	2000	8°31'	0,2	0,3	5,56
L1320.R24-10-3.0	TR24x10	2	24	10	5	21,094	21,394	17,269	18,500	3000	8°31'	0,2	0,3	8,34
L1320.R26-05-1.0	TR26x5	1	26	5	5	23,094	23,394	19,269	20,500	1000	3°55'	0,05	0,2	3,32
L1320.R26-05-1.5	TR26x5	1	26	5	5	23,094	23,394	19,269	20,500	1500	3°55'	0,05	0,2	4,98
L1320.R26-05-2.0	TR26x5	1	26	5	5	23,094	23,394	19,269	20,500	2000	3°55'	0,05	0,2	6,64
L1320.R26-05-3.0	TR26x5	1	26	5	5	23,094	23,394	19,269	20,500	13000	3°55'	0,05	0,2	9,96
L1320.R26-10-1.0	TR26x10	2	26	10	5	23,058	23,394	19,269	20,500	1000	7°48'	0,2	0,3	3,32
L1320.R26-10-1.5	TR26x10	2	26	10	5	23,094	23,394	19,269	20,500	1500	7°48'	0,2	0,3	4,98
L1320.R26-10-2.0	TR26x10	2	26	10	5	23,094	23,394	19,269	20,500	2000	7°48'	0,2	0,3	6,64
L1320.R26-10-3.0	TR26x10	2	26	10	5	23,094	23,394	19,269	20,500	3000	7°48'	0,2	0,3	9,96
L1320.R28-05-1.0	TR28x5	1	28	5	5	25,094	25,394	21,269	22,500	1000	3°36'	0,05	0,2	3,90
L1320.R28-05-1.5	TR28x5	1	28	5	5	25,094	25,394	21,269	22,500	1500	3°36'	0,05	0,2	5,85
L1320.R28-05-2.0	TR28x5	1	28	5	5	25,094	25,394	21,269	22,500	2000	3°36'	0,05	0,2	7,8
L1320.R28-05-3.0	TR28x5	1	28	5	5	25,094	25,394	21,269	22,500	3000	3°36'	0,05	0,2	11,7
L1320.R28-10-1.0	TR28x10	2	28	10	5	25,058	25,394	21,269	22,500	1000	7°12'	0,2	0,3	3,90
L1320.R28-10-1.5	TR28x10	2	28	10	5	25,094	25,394	21,269	22,500	1500	7°12'	0,2	0,3	5,85
L1320.R28-10-2.0	TR28x10	2	28	10	5	25,094	25,394	21,269	22,500	2000	7°12'	0,2	0,3	7,80
L1320.R28-10-3.0	TR28x10	2	28	10	5	25,094	25,394	21,269	22,500	3000	7°12'	0,2	0,3	11,7
L1320.R30-06-1.0	TR30x6	1	30	6	6	26,547	26,882	21,563	23,000	1000	4°05'	0,07	0,2	4,35
L1320.R30-06-1.5	TR30x6	1	30	6	6	26,547	26,882	21,563	23,000	1500	4°05'	0,07	0,2	6,52
L1320.R30-06-2.0	TR30x6	1	30	6	6	26,547	26,882	21,563	23,000	2000	4°05'	0,07	0,2	8,70
L1320.R30-06-3.0	TR30x6	1	30	6	6	26,547	26,882	21,563	23,000	3000	4°05'	0,07	0,2	13,05
L1320.R30-12-1.0	TR30x12	2	30	12	6	26,058	26,882	21,563	23,000	1000	8°08'	0,2	0,3	4,35
L1320.R30-12-1.5	TR30x12	2	30	12	6	26,547	26,882	21,563	23,000	1500	8°08'	0,2	0,3	6,52
L1320.R30-12-2.0	TR30x12	2	30	12	6	26,547	26,882	21,563	23,000	2000	8°08'	0,2	0,3	8,70
L1320.R30-12-3.0	TR30x12	2	30	12	6	26,547	26,882	21,563	23,000	3000	8°08'	0,2	0,3	13,05
L1320.R32-06-1.0	TR32x6	1	32	6	6	28,547	28,882	23,563	25,000	1000	3°48'	0,07	0,2	5,03
L1320.R32-06-1.5	TR32x6	1	32	6	6	28,547	28,882	23,563	25,000	1500	3°48'	0,07	0,2	7,54
L1320.R32-06-2.0	TR32x6	1	32	6	6	28,547	28,882	23,563	25,000	2000	3°48'	0,07	0,2	10,06



Steel Lead Screws

right hand thread

Lead Screws & Nuts

Order No.	Size	No. of starts	d ₁ tol. 7e	Lead	p ₁	d ₂ tol. 7e min.	d ₂ tol. 7e max.	d ₃ tol. 7h min.	d ₃ tol. 7h max.	l ₁	Lead angle	Pitch accuracy mm/300mm	Straightness mm/300mm	Weight kg
L1320.R32-06-3.0	TR32x6	1	32	6	6	28,547	28,882	23,563	25,000	3000	3°48'	0,07	0,2	15,09
L1320.R32-12-1.0	TR32x12	2	32	12	6	28,507	28,882	23,563	25,000	1000	7°34'	0,2	0,3	5,03
L1320.R32-12-1.5	TR32x12	2	32	12	6	28,547	28,882	23,563	25,000	1500	7°34'	0,2	0,3	7,54
L1320.R32-12-2.0	TR32x12	2	32	12	6	28,547	28,882	23,563	25,000	2000	7°34'	0,2	0,3	10,06
L1320.R32-12-3.0	TR32x12	2	32	12	6	28,547	28,882	23,563	25,000	3000	7°34'	0,2	0,3	15,09
L1320.R36-06-1.0	TR36x6	1	36	6	6	32,547	32,882	27,563	29,000	1000	3°20'	0,07	0,2	6,54
L1320.R36-06-1.5	TR36x6	1	36	6	6	32,547	32,882	27,563	29,000	1500	3°20'	0,07	0,2	9,81
L1320.R36-06-2.0	TR36x6	1	36	6	6	32,547	32,882	27,563	29,000	2000	3°20'	0,07	0,2	13,08
L1320.R36-06-3.0	TR36x6	1	36	6	6	32,547	32,882	27,563	29,000	3000	3°20'	0,07	0,2	19,62
L1320.R36-12-1.0	TR36x12	2	36	12	6	32,507	32,882	27,563	29,000	1000	6°39'	0,2	0,3	6,54
L1320.R36-12-1.5	TR36x12	2	36	12	6	32,547	32,882	27,563	29,000	1500	6°39'	0,2	0,3	9,81
L1320.R36-12-2.0	TR36x12	2	36	12	6	32,547	32,882	27,563	29,000	2000	6°39'	0,2	0,3	13,08
L1320.R36-12-3.0	TR36x12	2	36	12	6	32,547	32,882	27,563	29,000	3000	6°39'	0,2	0,3	19,62
L1320.R40-07-1.0	TR40x7	1	40	7	7	36,020	36,375	30,381	32,000	1000	3°31'	0,08	0,2	7,98
L1320.R40-07-1.5	TR40x7	1	40	7	7	36,020	36,375	30,381	32,000	1500	3°31'	0,08	0,2	11,97
L1320.R40-07-2.0	TR40x7	1	40	7	7	36,020	36,375	30,381	32,000	2000	3°31'	0,08	0,2	15,96
L1320.R40-07-3.0	TR40x7	1	40	7	7	36,020	36,375	30,381	32,000	3000	3°31'	0,08	0,2	23,94
L1320.R40-14-1.0	TR40x14	2	40	14	7	35,977	36,375	30,381	32,000	1000	7°01'	0,2	0,3	7,98
L1320.R40-14-1.5	TR40x14	2	40	14	7	36,020	36,375	30,381	32,000	1500	7°01'	0,2	0,3	11,97
L1320.R40-14-2.0	TR40x14	2	40	14	7	36,020	36,375	30,381	32,000	2000	7°01'	0,2	0,3	15,96
L1320.R40-14-3.0	TR40x14	2	40	14	7	36,020	36,375	30,381	32,000	3000	7°01'	0,2	0,3	23,94
L1320.R44-07-1.0	TR44x7	1	44	7	7	40,020	40,375	34,381	36,000	1000	3°10'	0,08	0,2	9,85
L1320.R44-07-1.5	TR44x7	1	44	7	7	40,020	40,375	34,381	36,000	1500	3°10'	0,08	0,2	14,78
L1320.R44-07-2.0	TR44x7	1	44	7	7	40,020	40,375	34,381	36,000	2000	3°10'	0,08	0,2	19,70
L1320.R44-07-3.0	TR44x7	1	44	7	7	40,020	40,375	34,381	36,000	3000	3°10'	0,08	0,2	29,55
L1320.R44-14-1.0	TR44x14	2	44	14	7	39,977	40,375	34,381	36,000	1000	6°20'	0,2	0,3	9,85
L1320.R44-14-1.5	TR44x14	2	44	14	7	39,977	40,375	34,381	36,000	1500	6°20'	0,2	0,3	14,78
L1320.R44-14-2.0	TR44x14	2	44	14	7	39,977	40,375	34,381	36,000	2000	6°20'	0,2	0,3	19,70
L1320.R44-14-3.0	TR44x14	2	44	14	7	39,977	40,375	34,381	36,000	3000	6°20'	0,2	0,3	29,55
L1320.R50-08-1.0	TR50x8	1	50	8	8	45,468	45,868	39,168	41,000	1000	3°11'	0,1	0,2	12,69
L1320.R50-08-1.5	TR50x8	1	50	8	8	45,468	45,868	39,168	41,000	1500	3°11'	0,1	0,2	19,03
L1320.R50-08-2.0	TR50x8	1	50	8	8	45,468	45,868	39,168	41,000	2000	3°11'	0,1	0,2	25,38
L1320.R50-08-3.0	TR50x8	1	50	8	8	45,468	45,868	39,168	41,000	3000	3°11'	0,1	0,2	38,07
L1320.R55-09-1.0	TR55x9	1	55	9	9	49,935	50,360	42,979	45,000	1000	3°16'	0,1	0,2	15,40
L1320.R55-09-1.5	TR55x9	1	55	9	9	49,935	50,360	42,979	45,000	1500	3°16'	0,1	0,2	23,10
L1320.R55-09-2.0	TR55x9	1	55	9	9	49,935	50,360	42,979	45,000	2000	3°16'	0,1	0,2	30,80
L1320.R55-09-3.0	TR55x9	1	55	9	9	49,935	50,360	42,979	45,000	3000	3°16'	0,1	0,2	46,20
L1320.R60-09-1.0	TR60x9	1	60	9	9	54,935	55,360	47,979	50,000	1000	2°58'	0,1	0,2	18,49
L1320.R60-09-1.5	TR60x9	1	60	9	9	54,935	55,360	47,979	50,000	1500	2°58'	0,1	0,2	27,73
L1320.R60-09-2.0	TR60x9	1	60	9	9	54,935	55,360	47,979	50,000	2000	2°58'	0,1	0,2	36,98
L1320.R60-09-3.0	TR60x9	1	60	9	9	54,935	55,360	47,979	50,000	3000	2°58'	0,1	0,2	55,47
L1320.R70-10-1.0	TR70x10	1	70	10	10	64,425	64,850	56,819	59,000	1000	2°49'	0,1	0,4	25,62
L1320.R70-10-1.5	TR70x10	1	70	10	10	64,425	64,850	56,819	59,000	1500	2°49'	0,1	0,4	38,43
L1320.R70-10-2.0	TR70x10	1	70	10	10	64,425	64,850	56,819	59,000	2000	2°49'	0,1	0,4	51,24
L1320.R70-10-3.0	TR70x10	1	70	10	10	64,425	64,850	56,819	59,000	3000	2°49'	0,1	0,4	76,86
L1320.R80-10-1.0	TR80x10	1	80	10	10	74,425	74,850	66,819	69,000	1000	2°27'	0,1	0,4	34,18
L1320.R80-10-1.5	TR80x10	1	80	10	10	74,425	74,850	66,819	69,000	1500	2°27'	0,1	0,4	51,27
L1320.R80-10-2.0	TR80x10	1	80	10	10	74,425	74,850	66,819	69,000	2000	2°27'	0,1	0,4	68,36
L1320.R80-10-3.0	TR80x10	1	80	10	10	74,425	74,850	66,819	69,000	3000	2°27'	0,1	0,4	102,54
L1320.R90-12-1.0	TR90x12	1	90	12	12	83,365	83,840	74,446	77,000	1000	2°36'	0,2	0,5	43,00
L1320.R90-12-1.5	TR90x12	1	90	12	12	83,365	83,840	74,446	77,000	1500	2°36'	0,2	0,5	64,50
L1320.R90-12-2.0	TR90x12	1	90	12	12	83,365	83,840	74,446	77,000	2000	2°36'	0,2	0,5	86,00
L1320.R90-12-3.0	TR90x12	1	90	12	12	83,365	83,840	74,446	77,000	3000	2°36'	0,2	0,5	129,00
L1320.R95-16-1.0	TR95x16	1	95	16	16	86,250	86,810	73,710	77,000	1000	3°22'	0,2	1,0	45,60
L1320.R95-16-1.5	TR95x16	1	95	16	16	86,250	86,810	73,710	77,000	1500	3°22'	0,2	1,0	68,40
L1320.R95-16-2.0	TR95x16	1	95	16	16	86,250	86,810	73,710	77,000	2000	3°22'	0,2	1,0	91,20
L1320.R95-16-3.0	TR95x16	1	95	16	16	86,250	86,810	73,710	77,000	3000	3°22'	0,2	1,0	136,80
L1320.R100-16-1.0	TR100x16	1	100	16	16	91,250	91,810	78,710	82,000	1000	3°11'	0,2	1,0	51,00
L1320.R100-16-1.5	TR100x16	1	100	16	16	91,250	91,810	78,710	82,000	1500	3°11'	0,2	1,0	76,50
L1320.R100-16-2.0	TR100x16	1	100	16	16	91,250	91,810	78,710	82,000	2000	3°11'	0,2	1,0	102,00
L1320.R100-16-3.0	TR100x16	1	100	16	16	91,250	91,810	78,710	82,000	3000	3°11'	0,2	1,0	153,00
L1320.R120-16-1.0	TR120x16	1	120	16	16	111,25	111,81	98,710	102,00	1000	2°36'	0,2	1,0	76,00
L1320.R120-16-1.5	TR120x16	1	120	16	16	111,25	111,81	98,710	102,00	1500	2°36'	0,2	1,0	114,00
L1320.R120-16-2.0	TR120x16	1	120	16	16	111,25	111,81	98,710	102,00	2000	2°36'	0,2	1,0	152,00
L1320.R120-16-3.0	TR120x16	1	120	16	16	111,25	111,81	98,710	102,00	3000	2°36'	0,2	1,0	228,00

LEAD SCREWS & NUTS