





Medium Duty U Rail

countersunk holes



Long Linear Rails

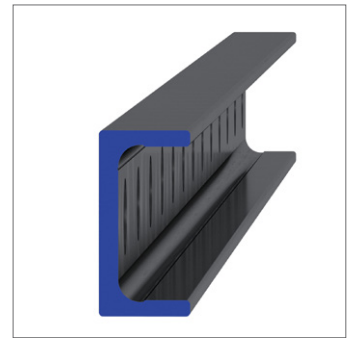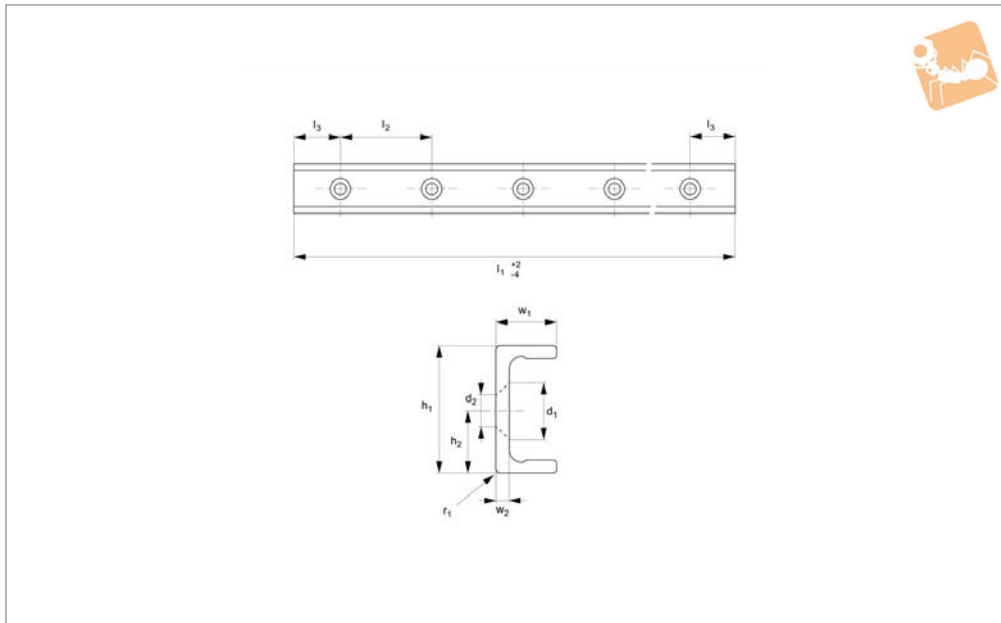

L1928.28U-V

LONG LINEAR RAILS

Material

Carbon steel. Raceways induction hardened and ground.
Electrolytic zinc-plated (excluding raceways).

Technical Notes

The U rail is a slave rail and is usually used

with a T master rail.

This is the U-V countersunk rail type which is usually used with a corresponding T-V rail.

For fixing use countersunk DIN 7991 screws.

Weight: 1,0 Kg/m.

Tips

Standard carriages are the L1928.N versions (die cast aluminium alloy with wipers). Alternatively the L1928.C type is also available (without wipers).

| Order No. | h_1 | h_2 | l_1 | l_2 | l_3 | r_1 | w_1 | w_2 | d for screws |
|------------------|-------|-------|-------|-------|-------|-------|-------|-------|--------------|
| L1928.28U-0240-V | 28 | 14 | 240 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-0320-V | 28 | 14 | 320 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-0400-V | 28 | 14 | 400 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-0480-V | 28 | 14 | 480 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-0560-V | 28 | 14 | 560 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-0640-V | 28 | 14 | 640 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-0720-V | 28 | 14 | 720 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-0800-V | 28 | 14 | 800 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-0880-V | 28 | 14 | 880 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-0960-V | 28 | 14 | 960 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-1040-V | 28 | 14 | 1040 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-1120-V | 28 | 14 | 1120 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-1200-V | 28 | 14 | 1200 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-1280-V | 28 | 14 | 1280 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-1360-V | 28 | 14 | 1360 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-1440-V | 28 | 14 | 1440 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-1520-V | 28 | 14 | 1520 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-1600-V | 28 | 14 | 1600 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-1680-V | 28 | 14 | 1680 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-1760-V | 28 | 14 | 1760 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-1840-V | 28 | 14 | 1840 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-1920-V | 28 | 14 | 1920 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-2000-V | 28 | 14 | 2000 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-2080-V | 28 | 14 | 2080 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-2160-V | 28 | 14 | 2160 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-2240-V | 28 | 14 | 2240 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-2320-V | 28 | 14 | 2320 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-2400-V | 28 | 14 | 2400 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-2480-V | 28 | 14 | 2480 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-2560-V | 28 | 14 | 2560 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-2640-V | 28 | 14 | 2640 | 80 | 40 | 1 | 12 | 3 | M5 |

Long Linear Rails

Medium Duty U Rail countersunk holes



LONG LINEAR RAILS

| Order No. | h ₁ | h ₂ | l ₁ | l ₂ | l ₃ | r ₁ | w ₁ | w ₂ | d for screws |
|------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|--------------|
| L1928.28U-2720-V | 28 | 14 | 2720 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-2800-V | 28 | 14 | 2800 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-2880-V | 28 | 14 | 2880 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-2960-V | 28 | 14 | 2960 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-3040-V | 28 | 14 | 3040 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-3120-V | 28 | 14 | 3120 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-3200-V | 28 | 14 | 3200 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-3280-V | 28 | 14 | 3280 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-3360-V | 28 | 14 | 3360 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-3440-V | 28 | 14 | 3440 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-3520-V | 28 | 14 | 3520 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-3600-V | 28 | 14 | 3600 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-3680-V | 28 | 14 | 3680 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-3760-V | 28 | 14 | 3760 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-3840-V | 28 | 14 | 3840 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-3920-V | 28 | 14 | 3920 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-4000-V | 28 | 14 | 4000 | 80 | 40 | 1 | 12 | 3 | M5 |
| L1928.28U-4080-V | 28 | 14 | 4080 | 80 | 40 | 1 | 12 | 3 | M5 |