

Standard ball screws



Miniature ball screws




Rolled ball screws


Ø	Pitch (travel per revolution)						
	5	10	16	20	25	40	50
16	●	●	●				
20	●	●		●			
25	●	●			●		
32	●	●		●			
40	●	●		●		●	
50		●		●			●
63		●		●			
80		●		●			

Miniature ball screws

Ø	Pitch (travel per revolution)						Nut
	1	2	2.5	4	5		
6	●					flanged	
8	●	●	●			flanged	
10		●		●		flanged/cylinder	
12		●		●	●	flanged/cylinder	
14		●				flanged/cylinder	

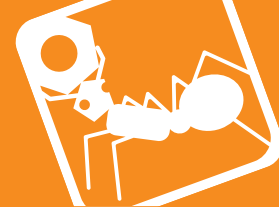

L1379.C

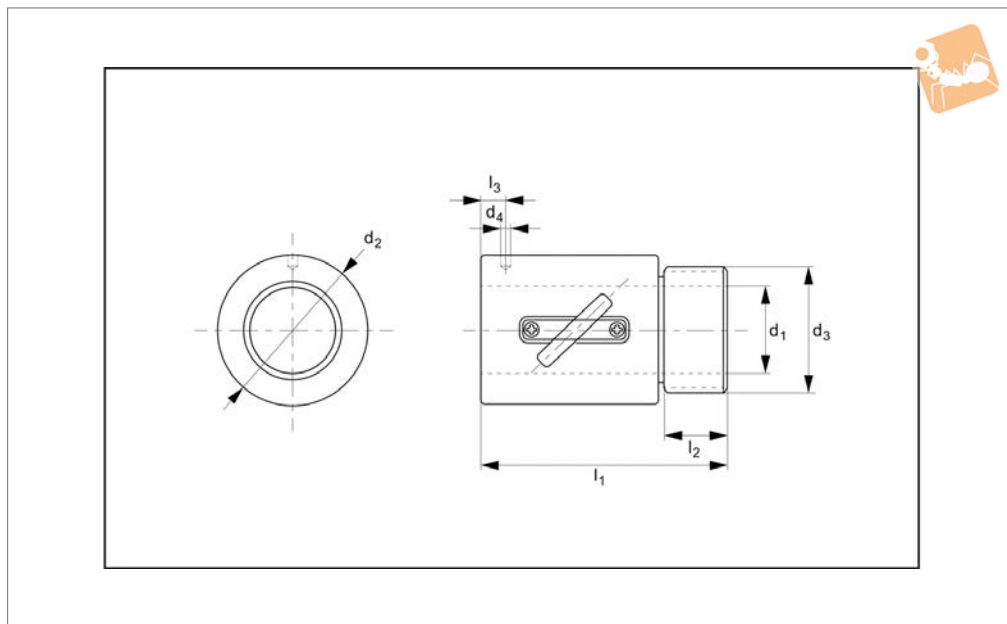

Material

Steel body (16MnCr5), balls (100Cr6) and polyurethane (Vulkolan) seals.

Technical Notes

Axial clearance 0,05mm.
Preload max. 5% of dynamic load.

For axial run-out, concentricity and parallelism figures see technical pages.
For use with miniature ball screws L1379.

Tips

Fit ball nut to screw using the sleeve provided. Offer up the ball nut to the screw



and slide carefully on. Do not remove the ball nut from the sleeve provided - the ball bearings can come loose rendering the ball nut unusable.

Order No.	d_1 for screw	Pitch	d_2 tol. G6	d_3	d_4	l_1 ± 0.15	l_2	l_3	No. of circuits	Ball dia.	Dyn. load C kN max.	Static load C_0 kN max.	Stiffness N/ μ m
L1379.C08-250	8	2,5	17,5	M15x1,0P	3,0	23,5	7,5	10,0	2,5x1	1,2	1,85	3,73	167
L1379.C10-020	10	2,0	19,5	M17x1,0P	3,2	22,0	7,5	3,0	3,5x1	1,2	2,72	6,51	167
L1379.C10-040	10	4,0	25,0	M20x1,0P	3,0	34,0	10,0	3,0	2,5x1	2,0	3,92	7,39	137
L1379.C12-040	12	4,0	25,5	M20x1,0P	3,0	34,0	10,0	13,0	3,5x1	2,5	7,88	16,16	226
L1379.C12-050	12	5,0	25,5	M20x1,0P	3,0	39,0	10,0	16,3	3,5x1	2,5	7,85	16,11	235
L1379.C14-040	14	4,0	32,1	M25x1,5P	3,0	35,0	10,0	11,0	3,0x1	2,5	7.33	15.77	235



Miniature Flanged Ball Nut

Ball Screw & Nuts

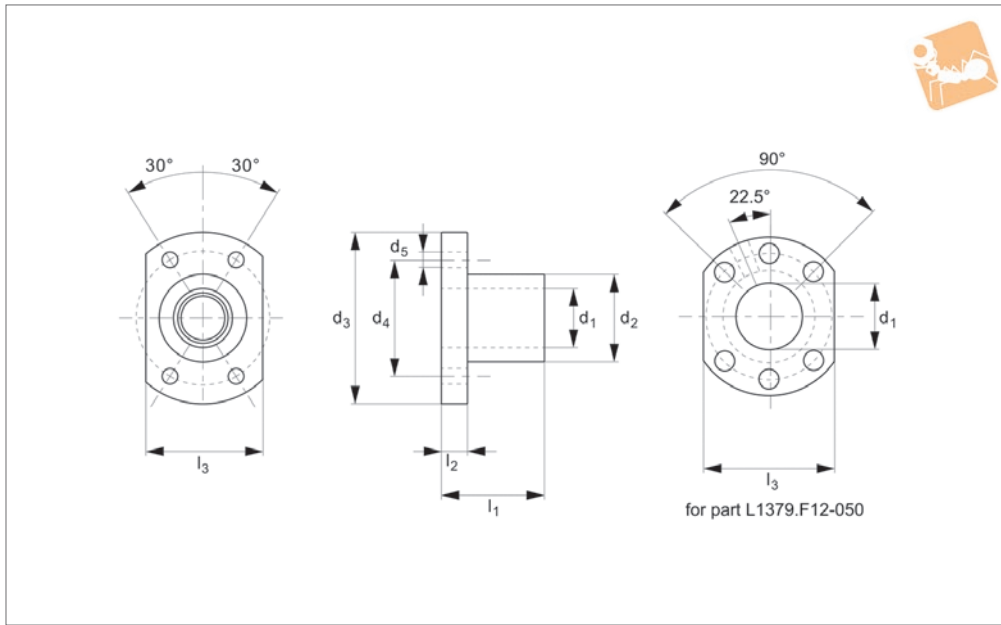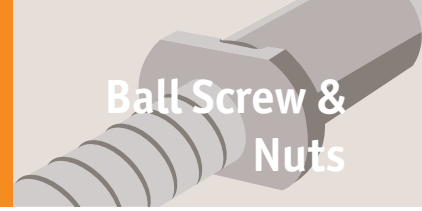

L1379.F

BALL SCREW & NUTS

Material

Steel body (16MnCr5), balls (100Cr6) and polyurethane (Vulkolan) seals.

Technical Notes

Axial clearance 0,05mm.

Preload max. 5% of dynamic load.

For axial run-out, concentricity and parallelism figures see technical pages.


For use with miniature ball screws L1379.06- L1379.14.

Tips


Fit ball nut to screw using the sleeve

provided. Offer up the ball nut to the screw and slide carefully on. Do not remove the ball nut from the sleeve provided - the ball bearings can come loose rendering the ball nut unusable.

Order No.	d ₁ for screw	Pitch	d ₂ tol. G6	d ₃	d ₄	d ₅	l ₁	l ₂	l ₃ ±0.10	No. of circuits	Ball dia.	Dyn. load C kN max.	Static load C ₀ kN max.	Stiffness N/μm
L1379.F06-010	6	1.0	12	24	18	3.4	15	3.5	16	3	0.8	1.09	2.19	88
L1379.F08-010	8	1.0	14	27	21	3.4	16	4.0	18	4	0.8	1.58	3.95	137
L1379.F08-020	8	2.0	14	27	21	3.4	16	4.0	18	3	1.2	2.17	4.49	127
L1379.F08-025	8	2.5	16	29	23	3.4	26	4.0	20	3	1.2	2.17	4.49	127
L1379.F10-020	10	2.0	18	35	27	4.5	28	5.0	22	3	1.2	2.38	5.58	147
L1379.F10-040	10	4.0	26	46	36	4.5	34	10.0	28	3	2.0	4.59	8.88	167
L1379.F12-020	12	2.0	20	37	29	4.5	28	5.0	24	4	1.2	3.17	8.88	216
L1379.F12-050	12	5.0	22	37	29	4.5	39	8.0	24	3	2.5	6.61	12.9	186
L1379.F14-020	14	2.0	21	40	31	5.5	23	6.0	26	4	1.2	3.48	10.3	235

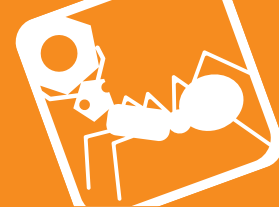

L1379.06

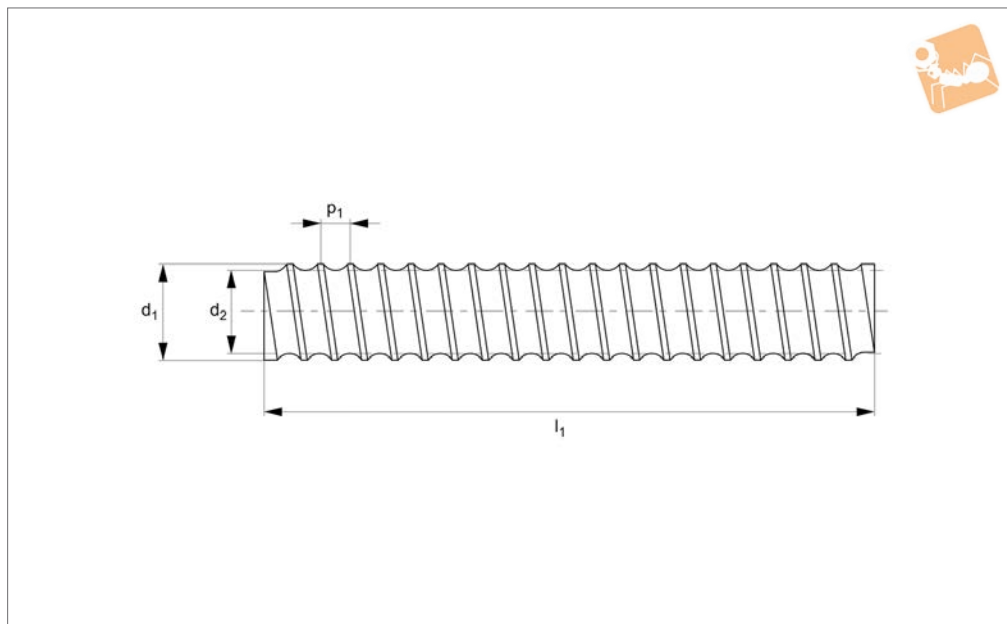

Material

Steel (Cf53 or C55R), hardened, rust proof chrome plated (X90CrMoV5).

Technical Notes

Tolerance T7 - 50µ/300mm.

For ball screw nuts L1379.F (flanged) and L1379.C (cylindrical).

For end machining of ball screws to suit miniature or standard ball screw support units please see technical pages.

We provide a service to cut and machine ball screws as required.

Chrome plating for use in food industry etc. contains 98% pure chromium.

Tips



Do not remove the ball nut from the sleeve that it comes with prior to installation - the balls come free rendering the ball nut unusable. Offer up the ball nut still on it's mounting sleeve to the ball screw and screw carefully on.

Order No.	d ₁	d ₂ core dia.	l ₁	Lead w ₁	Mass moment of inertia kg·m ²	Screw dia. x lead	Weight kg
L1379.06-10-0100	6	5.47	100	1	0,83x10 ⁻⁷	6x1	0.02
L1379.06-10-0200	6	5.47	200	1	0,83x10 ⁻⁷	6x1	0.04
L1379.06-10-0300	6	5.47	300	1	0,83x10 ⁻⁷	6x1	0.06
L1379.06-10-0400	6	5.47	400	1	0,83x10 ⁻⁷	6x1	0.08
L1379.06-10-0500	6	5.47	500	1	0,83x10 ⁻⁷	6x1	0.10
L1379.06-10-0600	6	5.47	600	1	0,83x10 ⁻⁷	6x1	0.12
L1379.06-10-0700	6	5.47	700	1	0,83x10 ⁻⁷	6x1	0.14
L1379.06-10-0800	6	5.47	800	1	0,83x10 ⁻⁷	6x1	0.16
L1379.06-10-0900	6	5.47	900	1	0,83x10 ⁻⁷	6x1	0.18
L1379.06-10-1000	6	5.47	1000	1	0,83x10 ⁻⁷	6x1	0.18



Ø 8 Miniature Rolled Ball Screws

steel

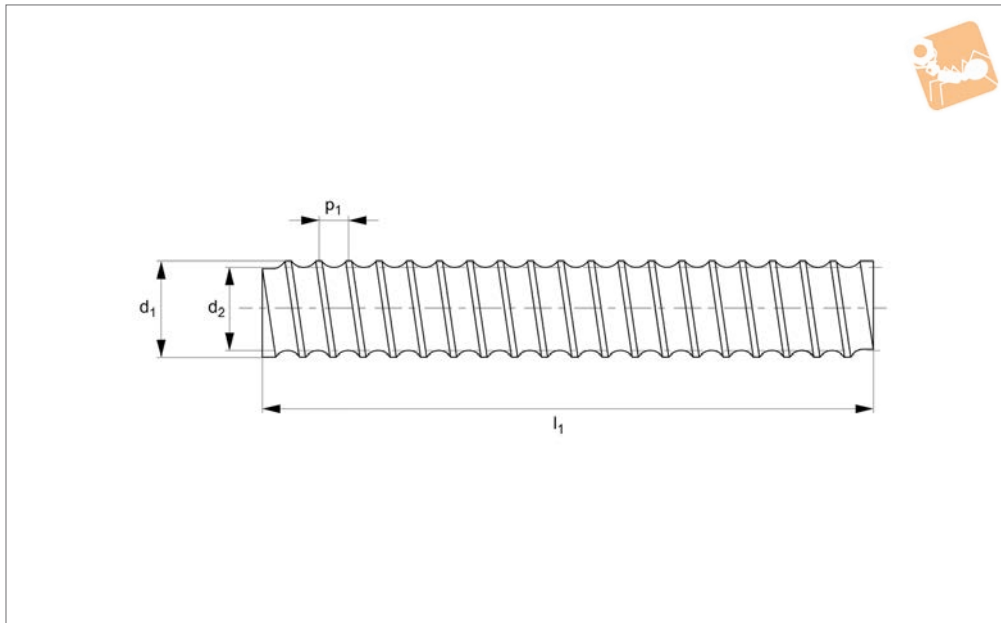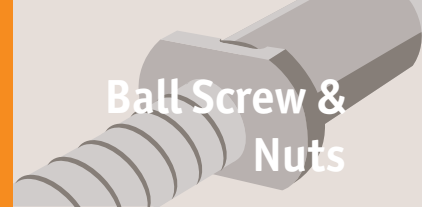

L1379.08

BALL SCREW & NUTS

Material

Steel (Cf53 or C55R), hardened, rust proof chrome plated (X90CrMoV5).

Technical Notes

Tolerance T7 - 50µ/300mm.

For ball screw nuts L1379.F (flanged) and L1379.C (cylindrical).

For end machining of ball screws to suit miniature or standard ball screw support units please see technical pages.



We provide a service to cut and machine ball screws as required.

Chrome plating for use in food industry etc. contains 98% pure chromium.


Tips

Do not remove the ball nut from the sleeve that it comes with prior to installation - the balls come free rendering the ball nut unusable. Offer up the ball nut still on its mounting sleeve to the ball screw and screw carefully on.

Order No.	d ₁	d ₂ core dia.	l ₁	Lead w ₁	Mass moment of inertia kg·m ²	Screw dia. x lead	Weight kg
L1379.08-10-0100	8	7.40	100	1.0	2,67x10 ⁻⁶	8x1,0	0.04
L1379.08-10-0200	8	7.40	200	1.0	2,67x10 ⁻⁶	8x1,0	0.07
L1379.08-10-0300	8	7.40	300	1.0	2,67x10 ⁻⁶	8x1,0	0.11
L1379.08-10-0400	8	7.40	400	1.0	2,67x10 ⁻⁶	8x1,0	0.14
L1379.08-10-0500	8	7.40	500	1.0	2,67x10 ⁻⁶	8x1,0	0.18
L1379.08-10-0600	8	7.40	600	1.0	2,67x10 ⁻⁶	8x1,0	0.22
L1379.08-10-0700	8	7.40	700	1.0	2,67x10 ⁻⁶	8x1,0	0.25
L1379.08-10-0800	8	7.40	800	1.0	2,67x10 ⁻⁶	8x1,0	0.29
L1379.08-10-0900	8	7.40	900	1.0	2,67x10 ⁻⁶	8x1,0	0.32
L1379.08-10-1000	8	7.40	1000	1.0	2,67x10 ⁻⁶	8x1,0	0.36
L1379.08-20-0100	8	7.21	100	2.0	2,71x10 ⁻⁶	8x2,0	0.04
L1379.08-20-0200	8	7.21	200	2.0	2,71x10 ⁻⁶	8x2,0	0.07
L1379.08-20-0300	8	7.21	300	2.0	2,71x10 ⁻⁶	8x2,0	0.11
L1379.08-20-0400	8	7.21	400	2.0	2,71x10 ⁻⁶	8x2,0	0.14
L1379.08-20-0500	8	7.21	500	2.0	2,71x10 ⁻⁶	8x2,0	0.18
L1379.08-20-0600	8	7.21	600	2.0	2,71x10 ⁻⁶	8x2,0	0.22
L1379.08-20-0700	8	7.21	700	2.0	2,71x10 ⁻⁶	8x2,0	0.25
L1379.08-20-0800	8	7.21	800	2.0	2,71x10 ⁻⁶	8x2,0	0.29
L1379.08-20-0900	8	7.21	900	2.0	2,71x10 ⁻⁶	8x2,0	0.32
L1379.08-20-1000	8	7.21	1000	2.0	2,71x10 ⁻⁶	8x2,0	0.36
L1379.08-25-0100	8	7.21	100	2.5	2,80x10 ⁻⁶	8x2,5	0.04
L1379.08-25-0200	8	7.21	200	2.5	2,80x10 ⁻⁶	8x2,5	0.07
L1379.08-25-0300	8	7.21	300	2.5	2,80x10 ⁻⁶	8x2,5	0.11
L1379.08-25-0400	8	7.21	400	2.5	2,80x10 ⁻⁶	8x2,5	0.15
L1379.08-25-0500	8	7.21	500	2.5	2,80x10 ⁻⁶	8x2,5	0.18
L1379.08-25-0600	8	7.21	600	2.5	2,80x10 ⁻⁶	8x2,5	0.22
L1379.08-25-0700	8	7.21	700	2.5	2,80x10 ⁻⁶	8x2,5	0.26
L1379.08-25-0800	8	7.21	800	2.5	2,80x10 ⁻⁶	8x2,5	0.27
L1379.08-25-0900	8	7.21	900	2.5	2,80x10 ⁻⁶	8x2,5	0.33
L1379.08-25-1000	8	7.21	1000	2.5	2,80x10 ⁻⁶	8x2,5	0.37

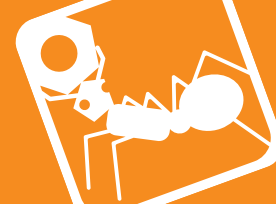

L1379.10

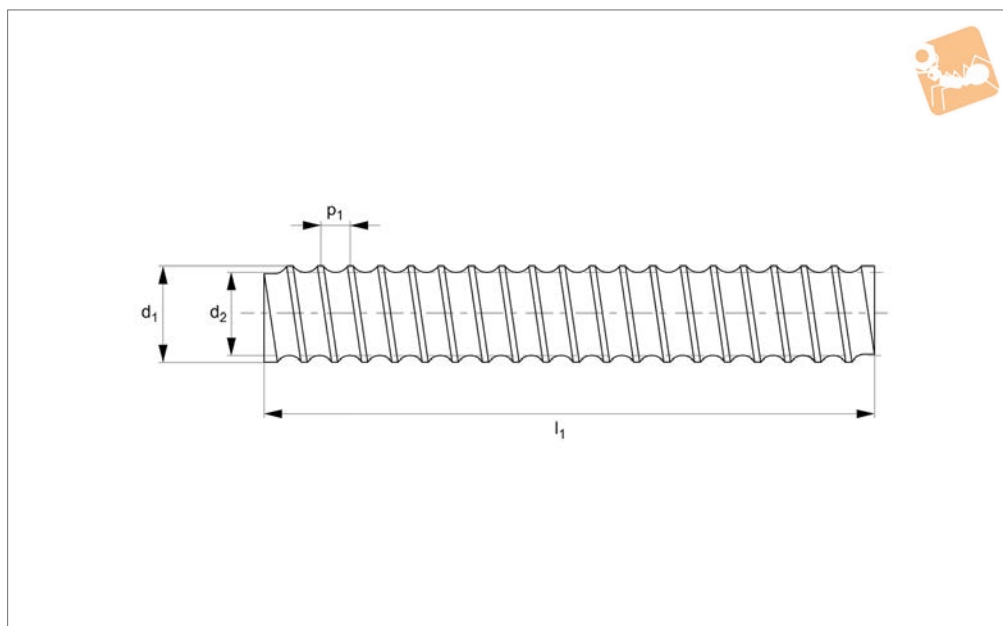

Material

Steel (Cf53 or C55R), hardened, rust proof chrome plated (X90CrMoV5).

Technical Notes

Tolerance T7 - 50µ/300mm.

For ball screw nuts see parts L1379.F and L1379.C.

For end machining of ball screws to suit miniature or standard ball screw support units please see technical pages.

We provide a service to cut and machine ball screws as required.

Chrome plating for use in food industry etc. contains 98% pure chromium.

Tips



Do not remove the ball nut from the sleeve that it comes with prior to installation - the balls come free rendering the ball nut unusable. Offer up the ball nut still on it's mounting sleeve to the ball screw and screw carefully on.

Order No.	d ₁	d ₂ core dia.	l ₁	Lead w ₁	Mass moment of inertia kg·m ²	Screw dia. x lead	Weight kg
L1379.10-20-0100	10	9.21	100	2	5,11x10 ⁻⁶	10x2	0.06
L1379.10-20-0200	10	9.21	200	2	5,11x10 ⁻⁶	10x2	0.12
L1379.10-20-0300	10	9.21	300	2	5,11x10 ⁻⁶	10x2	0.17
L1379.10-20-0400	10	9.21	400	2	5,11x10 ⁻⁶	10x2	0.23
L1379.10-20-0500	10	9.21	500	2	5,11x10 ⁻⁶	10x2	0.29
L1379.10-20-0600	10	9.21	600	2	5,11x10 ⁻⁶	10x2	0.35
L1379.10-20-0700	10	9.21	700	2	5,11x10 ⁻⁶	10x2	0.41
L1379.10-20-0800	10	9.21	800	2	5,11x10 ⁻⁶	10x2	0.46
L1379.10-20-0900	10	9.21	900	2	5,11x10 ⁻⁶	10x2	0.52
L1379.10-20-1000	10	9.21	1000	2	5,11x10 ⁻⁶	10x2	0.58
L1379.10-40-0100	10	8.68	100	4	6,53x10 ⁻⁶	10x4	0.06
L1379.10-40-0200	10	8.68	200	4	6,53x10 ⁻⁶	10x4	0.11
L1379.10-40-0300	10	8.68	300	4	6,53x10 ⁻⁶	10x4	0.17
L1379.10-40-0400	10	8.68	400	4	6,53x10 ⁻⁶	10x4	0.23
L1379.10-40-0500	10	8.68	500	4	6,53x10 ⁻⁶	10x4	0.28
L1379.10-40-0600	10	8.68	600	4	6,53x10 ⁻⁶	10x4	0.34
L1379.10-40-0700	10	8.68	700	4	6,53x10 ⁻⁶	10x4	0.40
L1379.10-40-0800	10	8.68	800	4	6,53x10 ⁻⁶	10x4	0.46
L1379.10-40-0900	10	8.68	900	4	6,53x10 ⁻⁶	10x4	0.51
L1379.10-40-1000	10	8.68	1000	4	6,53x10 ⁻⁶	10x4	0.57



Ø12 Miniature Rolled Ball Screws

Ball Screw & Nuts

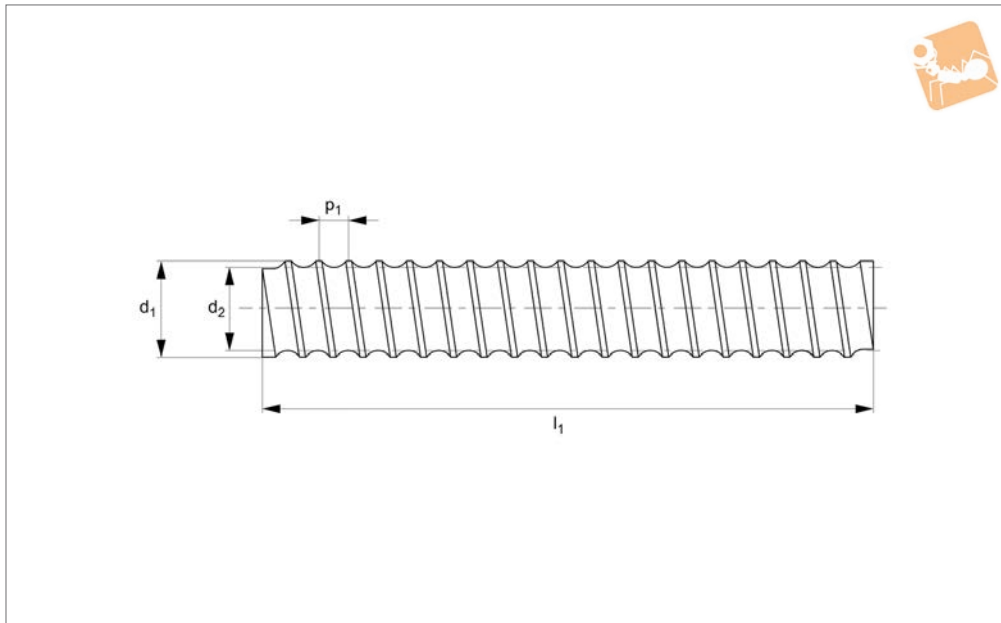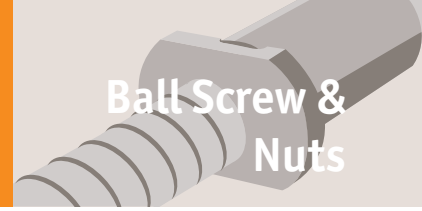

L1379.12

BALL SCREW & NUTS

Material

Steel (Cf53 or C55R), hardened, rust proof chrome plated (X90CrMoV5).

Technical Notes

Tolerance T7 - 50µ/300mm.

For ball screw nuts see parts L1379.F and L1379.C.

For end machining of ball screws to suit miniature or standard ball screw support units please see technical pages.

We provide a service to cut and machine ball screws as required.

Chrome plating for use in food industry etc. contains 98% pure chromium.


Tips

Do not remove the ball nut from the sleeve that it comes with prior to installation - the balls come free rendering the ball nut unusable. Offer up the ball nut still on its mounting sleeve to the ball screw and screw carefully on.

Order No.	d ₁	d ₂ core dia.	l ₁	Lead w ₁	Mass moment of inertia kg·m ²	Screw dia. x lead	Weight kg
L1379.12-20-0100	12	11.21	100	2	1,07x10 ⁻⁵	12x2	0.06
L1379.12-20-0200	12	11.21	200	2	1,07x10 ⁻⁵	12x2	0.12
L1379.12-20-0300	12	11.21	300	2	1,07x10 ⁻⁵	12x2	0.19
L1379.12-20-0400	12	11.21	400	2	1,07x10 ⁻⁵	12x2	0.25
L1379.12-20-0500	12	11.21	500	2	1,07x10 ⁻⁵	12x2	0.31
L1379.12-20-0600	12	11.21	600	2	1,07x10 ⁻⁵	12x2	0.37
L1379.12-20-0700	12	11.21	700	2	1,07x10 ⁻⁵	12x2	0.43
L1379.12-20-0800	12	11.21	800	2	1,07x10 ⁻⁵	12x2	0.50
L1379.12-20-0900	12	11.21	900	2	1,07x10 ⁻⁵	12x2	0.56
L1379.12-20-1000	12	11.21	1000	2	1,07x10 ⁻⁵	12x2	0.62
L1379.12-40-0100	12	9.80	100	4	1,51x10 ⁻⁵	12x4	0.09
L1379.12-40-0200	12	9.80	200	4	1,51x10 ⁻⁵	12x4	0.17
L1379.12-40-0300	12	9.80	300	4	1,51x10 ⁻⁵	12x4	0.26
L1379.12-40-0400	12	9.80	400	4	1,51x10 ⁻⁵	12x4	0.35
L1379.12-40-0500	12	9.80	500	4	1,51x10 ⁻⁵	12x4	0.43
L1379.12-40-0600	12	9.80	600	4	1,51x10 ⁻⁵	12x4	0.52
L1379.12-40-0700	12	9.80	700	4	1,51x10 ⁻⁵	12x4	0.61
L1379.12-40-0800	12	9.80	800	4	1,51x10 ⁻⁵	12x4	0.69
L1379.12-40-0900	12	9.80	900	4	1,51x10 ⁻⁵	12x4	0.77
L1379.12-40-1000	12	9.80	1000	4	1,51x10 ⁻⁵	12x4	0.86
L1379.12-50-0100	12	9.80	100	5	7,64x10 ⁻⁶	12x5	0.09
L1379.12-50-0200	12	9.80	200	5	7,64x10 ⁻⁶	12x5	0.16
L1379.12-50-0300	12	9.80	300	5	7,64x10 ⁻⁶	12x5	0.23
L1379.12-50-0400	12	9.80	400	5	7,64x10 ⁻⁶	12x5	0.31
L1379.12-50-0500	12	9.80	500	5	7,64x10 ⁻⁶	12x5	0.39
L1379.12-50-0600	12	9.80	600	5	7,64x10 ⁻⁶	12x5	0.47
L1379.12-50-0700	12	9.80	700	5	7,64x10 ⁻⁶	12x5	0.55
L1379.12-50-0800	12	9.80	800	5	7,64x10 ⁻⁶	12x5	0.62
L1379.12-50-0900	12	9.80	900	5	7,64x10 ⁻⁶	12x5	0.70
L1379.12-50-1000	12	9.80	1000	5	7,64x10 ⁻⁶	12x5	0.78



L1379.14

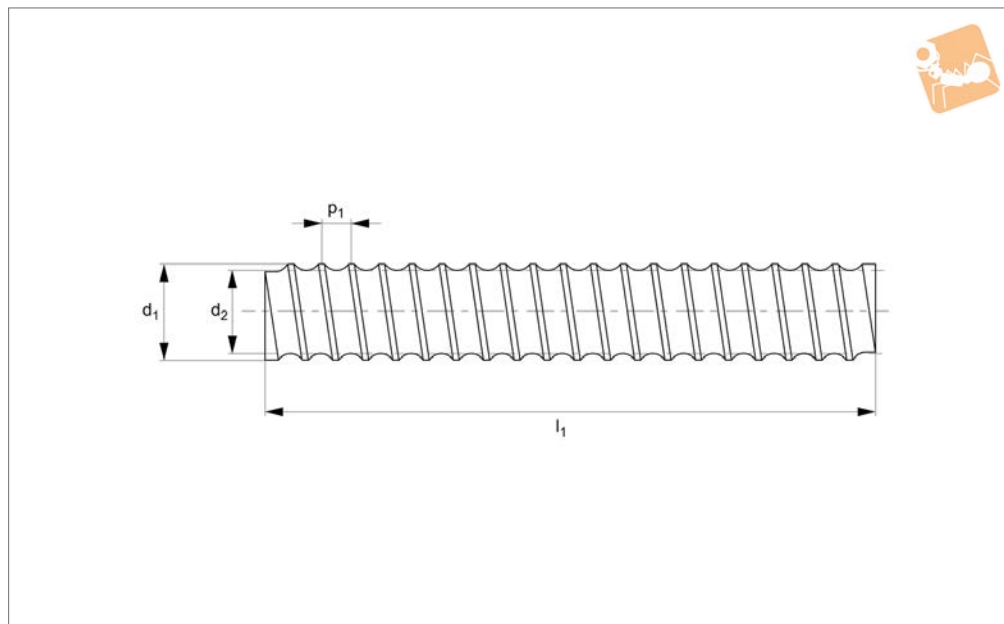

Material

Steel (Cf53 or C55R), hardened, rust proof chrome plated (X90CrMoV5).

Technical Notes

Tolerance T7 - 50µ/300mm.

For ball screw nuts L1379.F (flanged) and L1379.C (cylindrical).

For end machining of ball screws to suit miniature or standard ball screw support units please see technical pages.

We provide a service to cut and machine ball screws as required.

Chrome plating for use in food industry etc. contains 98% pure chromium.

Tips

Do not remove the ball nut from the sleeve that it comes with prior to installation - the balls come free rendering the ball nut unusable. Offer up the ball nut still on it's mounting sleeve to the ball screw and screw carefully on.

Order No.	d ₁	d ₂ core dia.	l ₁	Lead w ₁	Mass moment of inertia kg·m ²	Size dia. x lead	Weight kg
L1379.14-20-0100	14	13.21	100	2	2,01x10 ⁻⁵	14x2	0.08
L1379.14-20-0200	14	13.21	200	2	2,01x10 ⁻⁵	14x2	0.17
L1379.14-20-0300	14	13.21	300	2	2,01x10 ⁻⁵	14x2	0.26
L1379.14-20-0400	14	13.21	400	2	2,01x10 ⁻⁵	14x2	0.34
L1379.14-20-0500	14	13.21	500	2	2,01x10 ⁻⁵	14x2	0.46
L1379.14-20-0600	14	13.21	600	2	2,01x10 ⁻⁵	14x2	0.51
L1379.14-20-0700	14	13.21	700	2	2,01x10 ⁻⁵	14x2	0.60
L1379.14-20-0800	14	13.21	800	2	2,01x10 ⁻⁵	14x2	0.68
L1379.14-20-0900	14	13.21	900	2	2,01x10 ⁻⁵	14x2	0.77
L1379.14-20-1000	14	13.21	1000	2	2,01x10 ⁻⁵	14x2	0.85



When selecting a ball screw some of the main factors to consider are:

- Maximum required travel speed
- Maximum axial compression (buckling load)
- Method of support of the ball screws
- Type of unit required, flanged, cylindrical etc.

In general it is best to support the ball screws with our ball screw support units (L1388 to L1406) with a fixed end (generally where the motor is mounted) and a floating (support) end. The support units are selected to suit the loads likely to be required, the size of the ball screw (especially its core diameter) and the type of mounting required. Details of the machining required for each end of the ball screw are shown in the bearing mounts technical section.


The data table for the ball screws show the diameter, the lead of the ball screw (i.e. how far the nut travels for one complete revolution of the screw) as well as the mass moment of inertia (also known as the rotational moment of inertia) - this is the extent to which an object resists rotational acceleration about its axis.

Maximum speeds and buckling load data are shown in the technical pages.

When using a ball screw the ambient temperature should not exceed +80°C.

During assembly, the parallel alignment of the guides should be ensure.

The details on the concentricity of the ball nuts to the ball screws are shown on the technical pages. For linear guideways for use with ball screws please see our part numbers L1016 etc.

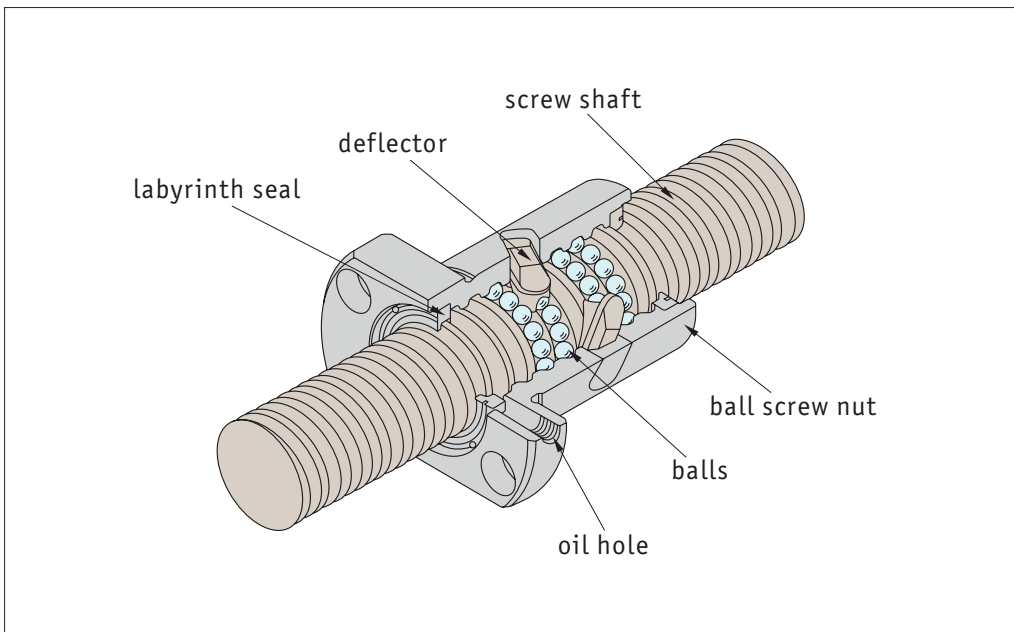


Lubrication - the ball screws must be adequately lubricated. This is dependent on load, speed, motion sequence and temperature. Do not use lubricants containing Mo/So or graphite.



In general, the ball nut is already on the ball screw and should not be removed. If you need to machine the ball screw, then the plastic mounting sleeve should be used to retain the ball bearings whilst the nut is removed.

Mounting the nut on the screw

Sometimes ball screws are delivered with a separate ball nut. When mounting the nut on to the screw take care as if done incorrectly the ball bearings may come off the ball nut.

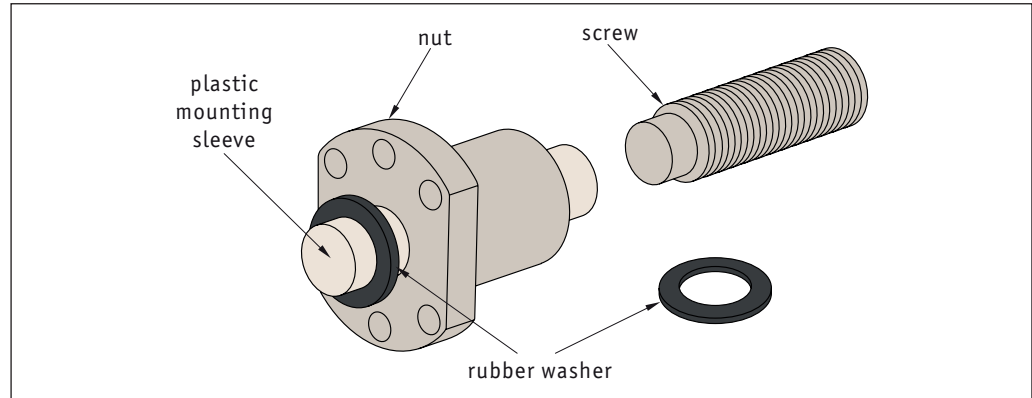

Ball nuts should be mounted only with the help of a plastic mounting sleeve (delivered with the nut). The start of the thread should be aligned so that the seal and the internal parts of the nut are not damaged.

1. Remove the rubber washer from one side of the sleeve. Push on the nut with the sleeve on the end of the screw. Press the sleeve against the start of the screw thread.
2. Screw the nut onto the thread using a slight axial pressure, then screw the nut on for its entire length.
3. Remove the mounting sleeve only when the nut is completely threaded on to the screw.
4. Lock the nut on to the screw (to prevent any unscrewing) using an O ring or similar - whilst installing the system.

If the balls do unfortunately escape...

1. Pick them up (the nut is only compatible with the original balls). The load capacity can still be achieved if one or two balls are missing.
2. Carefully clean all parts, use the sleeve as a mounting jig and replace the balls.
3. Start with the lowest circuit. Insert the balls into the nut circuit - the sleeve prevents the balls from falling out again.
4. Do not place the balls in the empty circuit located between the two deflectors.

If you have any technical queries please call **0333 207 4498**.